



Introducing the New **Snap'N Shield™**

*The most reliable, durable, and cost effective
way to protect your insulation*



Patent Pending



Features

- Ideal for horizontal pipe runs.
- Offers maximum protection for insulated pipe.
- Snaps directly onto channel.
- Shield length is 12".
- Fast, easy installation – no tools required.
- Snap-on design eliminates shield movement, preventing insulation damage that can lead to costly leaks.
- Allows pipe to expand without damaging the insulation.
- Protects insulation from damage caused by rubbing against other pipes and fittings.
- Designed for side-by-side installations.
- The most reliable, durable, and cost-effective way to protect your insulation.
- Available in black or white.

Phone: 800-851-7415 • www.cooperbline.com

Advantage Flyer • Pipe Hangers

COOPER B-Line

Technical Specifications

Applications: Refrigeration, Air Conditioning, and Plumbing



Material: Basell Pro-Fax 8523 Polypropylene Copolymer

- UV resistant
- Operating temperature -40°F to +178°F
- Paintable (Preserves mechanical properties even after painting)
- Non-adhesive surface for linear expansion of thermal insulation

Certification: UL Classified for USA (UL-723 (ASTM E 84))
and ULC listed for Canada (ULC-S102.2).
Meets UL94 HB flammability standards

Black Shields		White Shields		Inside Opening	Wt./C
UPC/Part Number	Catalog Number	UPC/Part Number	Catalog Number		
78205154707	BPS225B	78205154712	BPS225W	2 1/4"	26.0
78205154708	BPS325B	78205154713	BPS325W	3 1/4"	37.0
78205154709	BPS425B	78205154714	BPS425W	4 1/4"	52.0
78205154710	BPS525B	78205154716	BPS525W	5 1/4"	69.0
78205154711	BPS625B	78205154717	BPS625W	6 1/4"	83.0
78205154718	BPSCB	78205154719	BPSCW	Universal Cover	22.0

Inside Opening

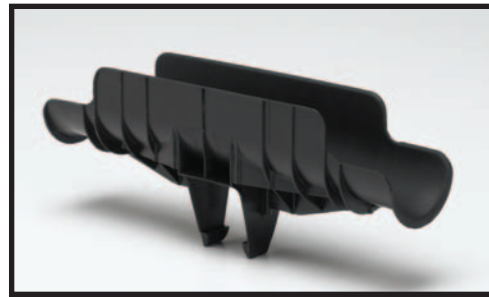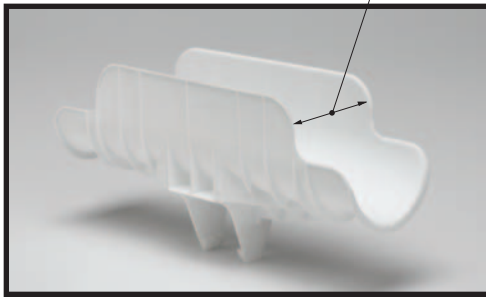

Copper Tubing Size	Insulation Thickness				
	1/2"	3/4"	1"	1 1/2"	2"
1/4"	BPS225	BPS225	BPS325	BPS425	BPS525
3/8"	BPS225	BPS225	BPS325	BPS425	BPS525
1/2"	BPS225	BPS225	BPS325	BPS425	BPS525
5/8"	BPS225	BPS325	BPS325	BPS425	BPS525
3/4"	BPS225	BPS325	BPS325	BPS425	BPS525
1"	BPS225	BPS325	BPS325	BPS425	BPS525
1 1/4"	BPS325	BPS325	BPS425	BPS525	BPS625
1 1/2"	BPS325	BPS325	BPS425	BPS525	BPS625
2"	BPS325	BPS425	BPS425	BPS525	BPS625
2 1/2"	BPS425	BPS425	BPS525	BPS625	--
3"	BPS425	BPS525	BPS525	BPS625	--
3 1/2"	BPS525	BPS525	BPS625	--	--
4"	BPS525	BPS625	BPS625	--	--

Sch. 40/80 Pipe	Insulation Thickness				
	1/2"	3/4"	1"	1 1/2"	2"
1/4"	BPS225	BPS225	BPS325	BPS425	BPS525
3/8"	BPS225	BPS225	BPS325	BPS425	BPS525
1/2"	BPS225	BPS325	BPS325	BPS425	BPS525
3/4"	BPS225	BPS325	BPS325	BPS425	BPS525
1"	BPS325	BPS325	BPS425	BPS525	BPS625
1 1/4"	BPS325	BPS325	BPS425	BPS525	BPS625
1 1/2"	BPS325	BPS425	BPS425	BPS525	BPS625
2"	BPS425	BPS425	BPS525	BPS625	BPS625
2 1/2"	BPS425	BPS525	BPS525	BPS625	--
3"	BPS525	BPS525	BPS625	BPS625	--
3 1/2"	BPS525	BPS625	BPS625	--	--
4"	BPS625	BPS625	--	--	--